


## ▲ DH-MV-A5B57M/CG200E

- 256MB on-board cache for data transmission and image data resend
- Support Software Trigger/Hardware Trigger/Free Run Mode
- Support ISP functions including Sharpness/Denoising/Gamma/LUT/BlackLevel Correction/TargetBrightness/Contrast etc
- Support multiple image format output/ROI/Binning/Mirror etc
- Conforms to GigE Vision V2.0 protocol and GenICam standard
- Conforms to CE,FCC,UL and RoHS certifications
- GigE interface provides 1Gbps bandwidth, with max 100m transmission distance

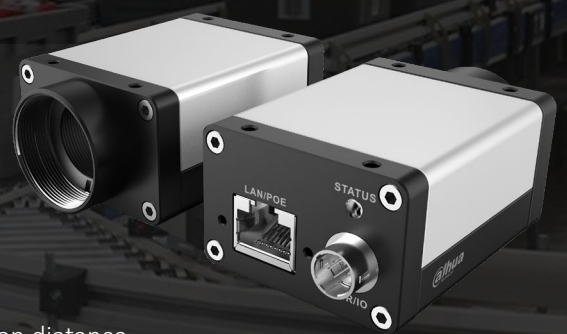


### Specification






Model	Sensor	Sensor type	Shutter	Resolution	Frame rate ( fps )	Bit depth	Interface	Mono/Color	Pixel size ( μ m )	Sensor size
DH-MV-A5B57MG200E	GMAX0505	CMOS	Global	5120x5120	4	12	GigE,PoE	Mono	2.5x2.5	1.1"
DH-MV-A5B57MG200E	GMAX0505	CMOS	Global	5120x5120	4	12	GigE,PoE	Color	2.5x2.5	1.1"

Model	DH-MV-A5B57MG200E	DH-MV-A5B57CG200E
Effective Pixels	25MP	
SNR	>35dB	
Dynamic Range	>64dB	
GPIO	6 pin Hirose: 1 Opto-isolated input, 1 Opto-isolated output	
Image Format	Mono8/10/10Packed/12/12Packed	Mono8, BayerGB8/10/10p/12/12p, YUV422p
Binning	Support	--
Decimation	No	
ROI	Support	
Gain	X1~X32	
Gamma	Range from 0 to 4, support LUT	
Exposure Time	5μs~1s	
Trigger Mode	Software trigger/Hardware trigger/Free run mode	
Image Buffer	128MB	
User Setting	Support two sets of user-defined configurations	
SPC	Support	
FPN	No	
Dimensions	29mmx44mmx58mm( not including lens mount and rear case connector)	
Weight	100g	
Power Supply	POE/DC power supply by Hirose connector,with voltage range from 6V to 26V	
Power Consumption	12V≈4.0W	
Lens Mount	C-mount	
Temperature	Storage temperature:-30° C~ + 80° C; Operation temperature:-30° C~+50° C	


## Spectrogram

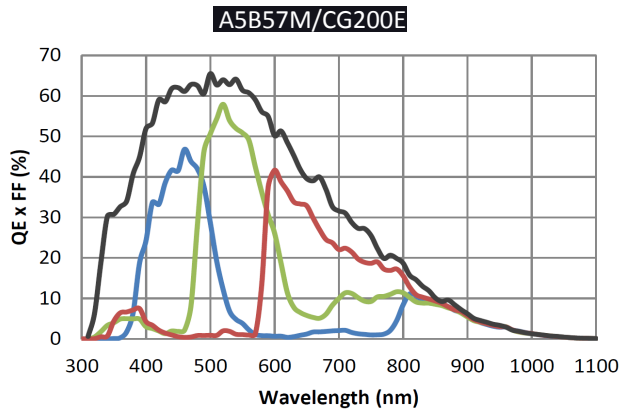

## Dimensions

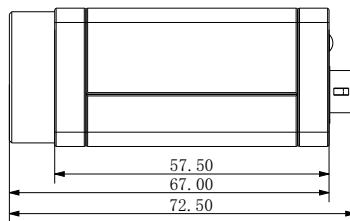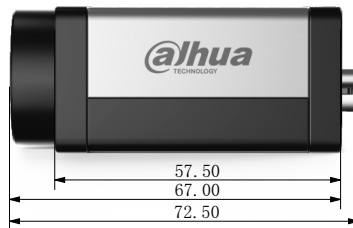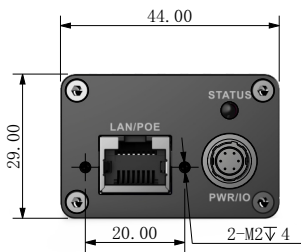

## IO Interface Instruction

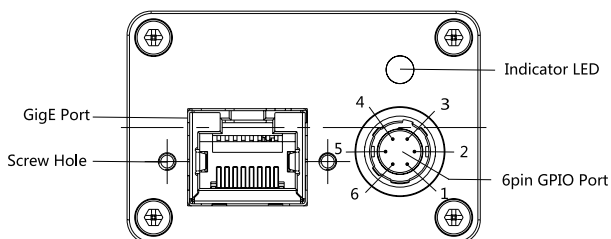

Pin	Signal	Description
1	Power	DC +6V~26V
2	Line1	Opto-isolated Input
3	Line2	NA
4	Line0	Opto-isolated Output
5	IO GND	Opto-isolated Ground
6	GND	DC Power Ground